

SYNDOME

ผู้นำด้านระบบสำรองไฟฟ้า



Titan Elite series Superior Group

★ General ★ ★ Better ★ ★ ★ Unique

System

- ★ True online double conversion Topology
- ★ DSP Control
- ★ IGBT conversion component
- ★ Tens of kHz, high frequency PWM
- ★ Emergency Power Off (EPO)

Operation mode


- ★ Normal Mode : Control V./ freq. sync. to line
- ★ ECO Mode : via bypass within Programablerange
- ★ Freq. Mode : Control both V. & F.

Performance


- ★ ★ Wide Input Range 100-300 VAC
- ★ ★ 0.9 Output Power Factor
- ★ ★ Input THDI <5%
- ★ ★ Output THDv <2% linear load
- ★ ★ Recharge to 90% battery capacity within 4 hours
- ★ ★ ★ Over Voltage Cut-Off device (OVCD) Up to 400 V.

User Interface

- ★ ★ Programmable LCD Display
- ★ ★ Free Power Management Software
- ★ Optional SNMP & Relay Cards

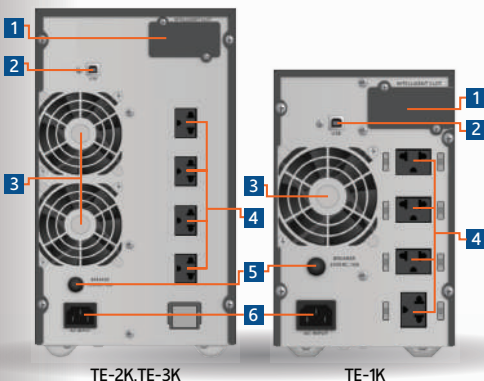

1. Intelligent Slot
2. USB
3. Cooling Fan
4. Outlet
5. Circuit Breaker
6. Input Power

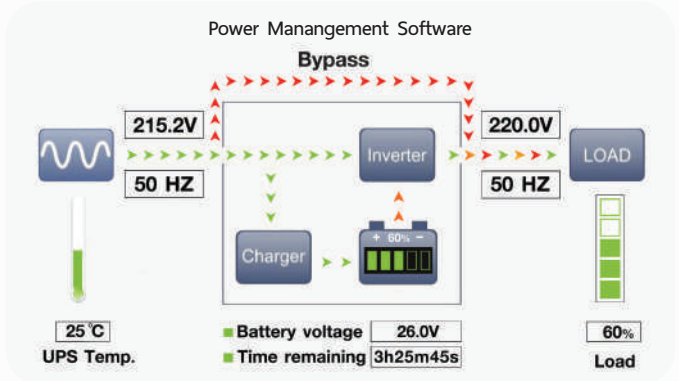

มอก. 1291 เล่ม1 - 2553
มอก. 1291 เล่ม2 - 2553
มอก. 1291 เล่ม3 - 2555



Syndome Electronics Industry Co.,Ltd.

66 ซอยประชาอุทิศ 59 แขวง 3 เขตคลองเตย กรุงเทพมหานคร 10140

Tel: (662)8726900 (auto) Fax: (662)8726909

URL: <http://www.syndome.com> Email: public@syndome.com

Line: @syndome Facebook: www.facebook.com/official.syndome

Product Information

MODEL		TE-1K	TE-1.5K	TE-2K	TE-3K
CAPACITY	VA/WATT	1000VA/900W (PF0.9)	1500VA/1350W (PF0.9)	2000VA/1800W (PF0.9)	3000VA/2700W (PF0.9)
INPUT	Voltage Range	100 - 300 VAC			
	Frequency Range	50 Hz ± 10% (Auto sensing)			
	Phase	Single phase with ground			
	Current THDI	<5%			
	Power Factor	≥ 0.99			
	Generator Input	2.2 x UPS Rating Power			
OUTPUT	Voltage Range	220 VAC ± 1%			
	Phase	Single phase with ground			
	Frequency	Synchronized	50 Hz ± 10%		
		Battery Mode	50 Hz ± 0.1%		
	Current Crest Ratio	3:1			
	Harmonic Distortion	< 2% THD (Linear Load)			
	Protection	Short Circuit Protection			
	Output Waform	Pure Sinewave			
	Outlet	Thai-Universal			
	Overload Capacity	Line Mode	1 min @ 105%~130% ; 10 sec @ 130% ~ 150% ; 300ms @ >150%		
Battery Mode		1 sec @ 105%~130% ; 1 sec @ 130% ~ 150% ; 300ms @ >150%			
EFFICIENCY	AC Mode / Battery Mode	> 89% / >84%		> 91% / >85%	
	ECO mode	> 97.2%		> 98%	
BATTERY	Number of Batteries	2		4	6
	Battery Capacity	12V/(7.2/9)Ahr			
	Backup Time (depend on load)	>15 min			
	Recharge Time (to 90%)	4 Hours			
	Charging Current (Max.)	1.5A			
	Rated Battery Voltage	24 Vdc		48 Vdc	72 Vdc
	Battery Type	Sealed Lead Acid Maintenance Free			
TRANSFER TIME	AC to DC	Zero			
LCD Display	Input / Output information:	Voltage / Frequency / Utility Present / Utility Lost			
	Load information:	Overload / Short circuit / Load level, Bypass configure: enable-disable			
	Battery infomation:	Battery Level / Battery Remaining Time / Battery Low			
	Mode information:	Bypass / Line / Battery / Fault / Warning / Operating-Fault-Warning Code / Operating Mode Icon			
AUDIBLE ALARM	Battery Mode	Sounding every 4 seconds			
	Low Battery	Sounding every second			
	Overload	Sounding twice every second			
	Fault	Continuously Sounding			
DIMENSION	W x H x D mm	144 x 229 x 345		190 x 330 x 393	190 x 330 x 393
WEIGHT	kg	9.4		17	22.2
ENVIRONMENT	Operating Environment	0-40° C			
	Relative Humidity	0-95% (NON-CONDENSING)			
	Noise Level	<45dB @ 1 Meter		<45dB @ 1 Meter	
INTERFACE	USB (built-in)	Software supports Windows Family, Linux, Sun Solaris, IBM AIX, Compaq True64, SGI IRIX, FressBSD, HP-UX and MAC			
	Smart Slot (Option)	SNMP Adapter/ AS400 Relay Card / RS485 / RS-232			
INTERNATIONAL STANDARDS	CE	ESD: IEC61000-4-2 Level 3, RS:IEC61000-4-3 Level 3, EFT:IEC61000-4-4 Level4, Surge:IEC61000-4-5 Level 4, Conduction:IEC62040-2 Cat C2, Radiation:IEC62040-2 Cat C2 Transportaion: Drop:ISTA 2A, Vibration:internal standard, Protection: IP20 (static)			



ສອກ. 1291 ເລັກ1 - 2553
ສອກ. 1291 ເລັກ2 - 2553
ສອກ. 1291 ເລັກ3 - 2555



Syndome Electronics Industry Co.,Ltd.

66 ບອຍປະເທດຈຸກ 59 ແືນ 3 ມັບອຸທຸກ ມາດາວຊຸນ ກຸນຊຸນພາຍ 10140

Tel: (662)8726900 (auto) Fax: (662)8726909

URL: <http://www.syndome.com> Email: public@syndome.com

Line: @syndome Facebook: www.facebook.com/official.syndome

MK-S-30-Rev0
ed.05/06/2020